

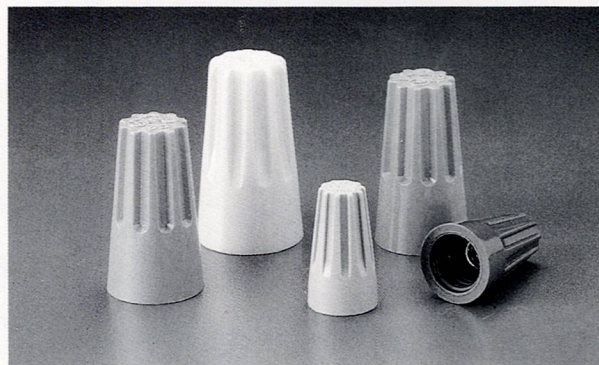


# SCREW-ON WIRE CONNECTORS

UL E-113650

SF LR-68461



## Dimensions :

Model	A		B		C		D		E	
	(mm)	( in )	(mm)	( in )	(mm)	( in )	(mm)	( in )	(mm)	( in )
P1	3.80	0.150	6.70	0.264	8.60	0.339	5.80	0.228	15.20	0.598
P2	4.10	0.161	7.00	0.276	9.80	0.386	5.90	0.232	17.60	0.693
P3	5.00	0.197	9.90	0.390	12.20	0.480	7.80	0.307	22.00	0.866
P4	6.00	0.236	11.20	0.441	14.00	0.551	7.90	0.311	24.00	0.945

Model	Color	Approved		Wire Range/Temperature	Packing
P1	Grey	UL	SF	300 Volt. Temperature - 105°C. #22 - #14 AWG. Max. 2 #16. Min. 3 #22.	Box of 100
					Ctn.of 20,000 (20 plastic bags, 1,000 ea)
					Bag of 25 (Bag packed with header)
P2	Blue	UL	SF	300 Volt. Temperature - 105°C. #22 - #14 AWG. Max.1 #14 w/1#16. Min. 1 #18 w/2 #22	Box of 100
					Ctn. of 10,000 (10 plastic bags, 1,000 ea)
					Bag of 25 (Bag packed with header)
P3	Orange	UL	SF	300Volt. Temperature - 105°C. #22 - #14 AWG. Max. 2 #14 w/1 #16 Min. 3 #20	Box of 100
					Ctn. of 5,000 (10 plastic bags, 500 ea)
					Bag of 25 (Bag packed with header)
P4	Yellow	UL	SF	300Volt. Temperature - 105°C. #22 - #14 AWG. Max. 2 #14 w/2 #16. Min. 1 #18 w/1 #22.	Box of 100
					Ctn. of 5,000 (10 plastic bags, 500 ea)
					Bag of 25 (Bag Packed with header)

\* Color coded to industry standards.